


PRODUCT MANUAL

HAMMOCK HOOKS PERMANENT INSTALLATION

TT502HH





250KG CAPACITY*

*Using both hammock hooks



WARNING

Read instructions before use and keep for future reference. Failure to read these instructions before use can lead to an increased risk of injury. When installing always check with a qualified builder for safety. Two Trees will only guarantee the performance of this product when used with other Two Trees products. i.e. If non Two Trees accessories are used, the guarantee is void.



SAFETY INSTRUCTIONS

Thank you for purchasing Two Trees Hammock Hooks.

We at Two Trees know the importance of spending time relaxing. Hence we've developed a range of quality hammocks and convenient accessories that come with easy to follow instructions so that you will be relaxing in no time. It is important to read all instructions before use and take care when using your hammock. Please ensure that you adhere to the following safety measures to get the maximum enjoyment from your new hammock.



WARNING

Read instructions before use and keep for future reference. Failure to read these instructions before use can lead to an increased risk of injury. When installing always check with a qualified builder for safety.

CAUTION AND SAFETY INSTRUCTIONS

- **1.** Assembly must be carried out by an Adult.
- Ensure hammock is fully assembled before use.
- **3. DO NOT** exceed the maximum load of 250kgs.
- 4. DO NOT climb into hammock feet first.
- 5. DO NOT stand in hammock.
- **6. DO NOT** dive into or jump about in hammock.
- **7. DO NOT** stick your head through the suspension cords.
- **8.** Keep suspension cords as straight as possible, **DO NOT** twist.
- **9. DO NOT** use damaged or weakened hammock hanging accessories.
- 10. Hammock fabrics and accessories will wear over time and use. Always check the loading capacity and condition of parts before use.
- Hammocks are not designed for swinging, playing, climbing or to be used as a children's toy.
- **12. DO NOT** leave children or pets unattended in or near hammock.
- 13. Hammock fabric, suspension cords and hanging accessories will become worn over time and use. Always inspect prior to use and DO NOT use if items show signs of damage or weakness.


- **14.** Always check the loading capacity before use.
- **15.** Keep hammock clear of obstructions.
- **16.** Allow a minimum of 50cm clearance range around the perimeter of your hammock when in use (Fig. 1).
- 17. Only use the hammock on level floors with shock-absorbing properties such as carpet or outdoor grass to minimise the risk of injury in case of an accident. DO NOT use on slippery or hard surfaces.
- **18.** Never use a free standing brick wall to hang your hammock.
- **19.** Only use Two Trees accessories for hanging your hammock.
- DO NOT modify hammock. Hammock must be used in accordance of this manual.
- **21. DO NOT** smoke in or around the hammock. Keep away from heat or flames.
- **22. DO NOT** use whilst wearing shoes, clothing, jewellery or accessories that have a hook and loop fastener.
- 23. DO NOT use near sharp objects.
- **24.** A copy of this manual must be provided should the hammock transfer ownership.



SAFETY INSTRUCTIONS

SELECTING THE LOCATION


There are many ways to hang your hammock, here are some of our favourite and recommended options:







BETWEEN TWO POSTS



THE TWO TREES HAMMOCKS RANGE INCLUDES












THINGS TO CONSIDER



WARNING

Read instructions before use and keep for future reference. Failure to read these instructions before use can lead to an increased risk of injury. When installing always check with a qualified builder for safety.



DO NOT twist or knot suspension cords when hanging.



Hammocks will stretch by 5-10% after the first few uses. Adjustments can be made after each use to keep you and your hammock comfortable.




DO NOT exceed the maximum load of 250kgs.



DO NOT leave children or pets unattended in or near hammock.




THINGS TO CONSIDER



Allow a minimum of 50cm clearance range around the perimeter of your hammock when in use. <Fig.1>

You need a minimum of 3 metres between each anchor point to get the ideal shape. For longer distances, simply add a fixing strap or some rope and increase the height of the anchor point approximately 60cm for every additional metre in length.

Depending on the hammock the angle will vary. Conventional hammocks are hung with sag at approx. 110 degrees. Rod hammocks are hung taut at approx. 150 degrees.






HOW TO HANG YOUR HAMMOCK

To hang your Two Trees hammock you will require two fixed points, such as trees, beams, posts, or dyna bolts into brick walls. Alternatively you can purchase a Two Trees Universal Stand. Consult a qualified builder if unsure.



WARNING: Never use a free standing brick wall to hang your hammock.



Your Two Trees hammock will require a minimum of 3 metres between fixing points to get the ideal shape. Rope may be needed to attach one end of the hammock, it is recommended to use a double piece to avoid the hammock twisting.


Hang the hammock loops at roughly the same height. When the hammock is in use it should sit 20-30cm above the ground.

PERMANENT INSTALLATIONS

For perfect results, use your Two Trees hammock hooks(TT502HH) with Two Trees hammock springs(TT503HS). A rope or chain can be used as a connection between your hammock and fixture point.

NOTE: It is recommended to use structurally sound, strong timber posts that are 10cm square or more. When installing always check with a gualified builder for safety.

- **1.** Determine the correct height to hang your hammock.
- 2. Drill a 10mm diameter pilot hole for hardwood (drill a 9mm hold for soft timber).
- **3.** Fasten screw eye firmly in place. To test, apply load with caution.
- Place the hammock spring on the hook. Repeat the process for the other side of the hammock.
- **5.** Ensure both springs are secure and then place hammock ends over hooks.

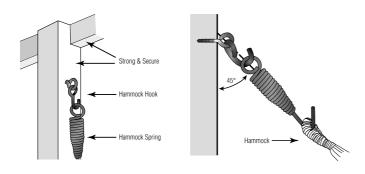



HOW TO HANG YOUR HAMMOCK



WARNING:

DO NOT EXCEED THE MAXIMUM LOAD OF 250KGS

The maximum capacity of the hammock hanging kit is 250kg, only if secured correctly at an angle of 50° or less from vertical. If using one hammock hook (to hang a chair hammock), the maximum capacity is 200kgs.

This product is not designed for excessive swinging as this may unhook the hammock or springs.

Read instructions before use and keep for future reference. Failure to read these instructions before use can lead to an increased risk of injury. When installing always check with a qualified builder for safety.





Made in China exclusively for Mayo Hardware Pty Ltd 4 Secombe Place, Moorebank NSW 2170 Australia Customer Service Phone: 1300 360 211 www.mayohardware.com.au | 2021° For more information visit www.twotreeshammocks.com.au We will honour all statutory guarantees that this product is of acceptable quality. (including that it is fit for purpose)